
Mueller[®] PIG-PLUG[™] Line Stopper Fitting Insert



Economical - "Pig-Friendly" - Easy Installation

The Mueller Pig-Plug Insert installs easily in larger size NO-BLO® Stopper Fittings to allow smart pigs to pass through them unimpeded. The insert is made of an inert, rugged, engineered polyurethane that can stand up to repeated pigging and permits the pig's sensors to perform their jobs properly. Standard Mueller Line Stopping Machines can install or remove the inserts in new or existing fittings on a pipeline.

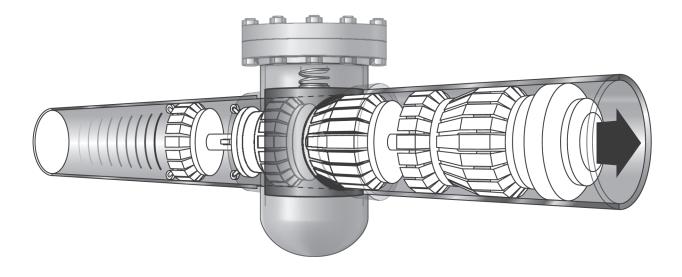

For more information about the Mueller Pig-Plug insert and its application, contact your Mueller Sales Representative or call Customer Service at 1-800-798-3131.



DESIGN DESCRIPTION	PIG PLUG PART NUMBER	INSERTING/EXTRACTING TOOL
12" Slotted	682644	682586
12" Solid	682775	682586
10" Slotted	682643	682586
10" Solid	682774	682586
8" Standard Wall Solid	682772	682724
8" Standard Wall Holes	683018	682724
8" Thin Wall Solid	682773	682724
8" Thin Wall Holes	683019	682724
6" Standard Wall Solid	682785	682724
6" Standard Wall Holes	683016	682724
6" Thin Wall Solid	682786	682724
6" Thin Wall Holes	683017	682724

The following images show a data read-out from a Magnetic Flux Leakage (MFL) tool being pulled through a 10" Mueller line stopper fitting with a Pig-Plug insert installed. The rounded shapes in the center of each image mark the fitting openings in the top and bottom of the pipe walls. The grills in the Pig-Plug insert that allow passage of gas through the top/bottom of the fitting are clearly seen in the middle image. In the bottom image, the banding to either side of these openings shows the ends of the fitting welded to the pipe's outside wall.

